



**DEFENSE LOGISTICS AGENCY**  
DEFENSE SUPPLY CENTER, COLUMBUS  
POST OFFICE BOX 3990  
COLUMBUS, OH 43218-3990

IN REPLY  
REFER TO

DSCC-VQH-08-14850 (Mr. Eschmeyer/614-692-0591/jre)

MAR 25 2008

SUBJECT: Commercial Laboratory Suitability Status, MIL-STD-883, FSC 5962 and  
MIL-STD-750, FSC 5961

Mr. Dan Rossiter  
Oneida Research Services, Incorporated  
8282 Halsey Road  
Whitesboro, NY 13492-3467

Dear Mr. Rossiter:

As a result of our audit on November 14 and 15, 2007, your facility at the above address is considered suitably equipped to perform testing on military devices for the following test methods of MIL-STD-883 and MIL-STD-750:

<u>TEST</u>	<u>METHOD</u>	<u>CONDITION</u>
Internal Gas Analysis	1018	Procedure 1

This suitability is limited to the internal gas analysis machines with serial numbers EQ-01-015 and EQ-06-009. This suitability is limited to volumes greater than or equal to 0.01 cm<sup>3</sup> for MIL-STD-883 tests. For MIL-STD-750 tests, packages with an internal cavity from 0.01 cm<sup>3</sup> to 20 cm<sup>3</sup> may be tested.

This suitability is valid until terminated by written notification from the office of primary interest (OPI) qualifying activity. Your laboratory may be re-audited on a drop-in basis and commercial laboratory suitability may be withdrawn by this Center at any time.

This suitability prohibits your company from removing or altering the device marking. Any device that fails testing conditions shall be identified (isolated) as a reject and returned to the device manufacturer for verification of failure mode or the device(s) shall be destroyed with manufacturer approval under government witness.

The approved test methods and procedures shall be used for all military testing. Any time the test method is specified in a contract or purchase order, etc., you must comply fully with the specified test method. Whenever the military standard is specified, the testing must be performed in accordance with the DSCC approved procedure, to all the military standard requirements, and in accordance with what was demonstrated during the DSCC audit. Any exceptions to the DSCC approved test method must be clearly stated in the contract. However, under no circumstances can changes, exceptions, waivers, etc., be applied when a test is done on a QPL or QML product unless the test method is officially amended or revised by the preparing activity of the military document.

Electrostatic discharge sensitivity (ESDS) requirements are enforced by this Center. Therefore, all hybrid/monolithic/semiconductor electronic devices will be handled as ESD sensitive (category 1), unless otherwise notified by the device manufacturer. Consequently, all processing procedures will

incorporate the handling, testing, and packaging requirements according to the guidelines in MIL-HDBK-263 and JESD625.


To maintain laboratory suitability status for the above listed test methods, you are required to compile a summary of all hybrid/monolithic electronic devices tested to the requirements of test method 1018 of MIL-STD-883 and a summary of semiconductor devices tested to the requirements of test method 1018 of MIL-STD-750. One summary to DSCC-VQH for MIL-STD-883 and the other summary to DSCC-VQE for MIL-STD-750 shall also include the other information described below and shall be submitted every twelve months.

Your standard reporting period is from July 1 through June 30. Your next retention report shall be submitted to DSCC by July 31, 2008. The retention report shall include the items in section IV of DSCC's Laboratory Suitability Information booklet.

The use of your laboratory for performing testing is subject to conditions stated in 4120.24-M and SD-6.

If you have any questions, please contact Mr. Eschmeyer at (614) 692-0591.

Sincerely,

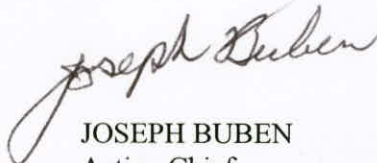

JOSEPH BUBEN  
Acting Chief  
Hybrid Devices Team